


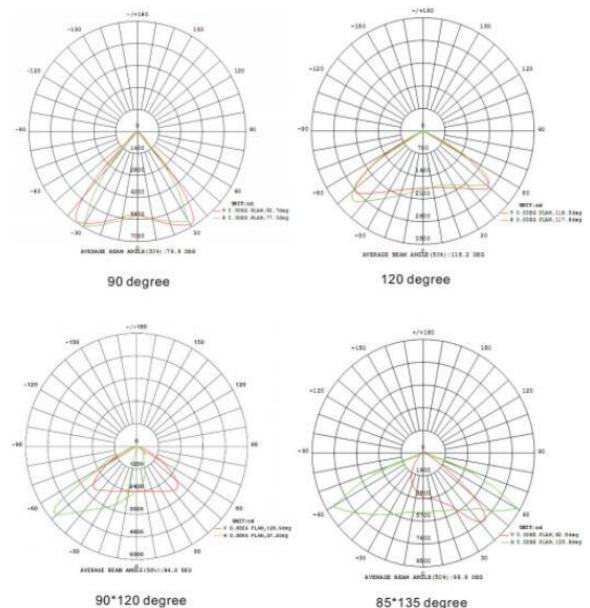


Ming Feng Lighting Co.,Ltd

Tel:+86-769-2203-6051 Fax: +86-769-2203-6052

Add: Wen Tang Administration, East City,Dongguan,Guangdong Province,China.

### MF-P020 LED Parking Light Data Sheet

<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li><b>Light Source:</b> 150LM/W <b>SAMSUNG 351B Chip / CREE XTE Chip</b> options, efficiency achieves 130LM/W.</li> <li><b>Driver:</b> Taiwan <b>Meanwell LED Driver</b>, Wide AC90-305V, PF&gt;0.98, low THD&lt;9%.</li> <li><b>Waterproof Grade:</b> <b>IP65</b></li> <li><b>Beam Angle:</b> <b>90°, 120°, 90*120°, 85*135°</b></li> <li><b>Functions:</b> <b>Dimmable, Photocell</b> available.</li> <li><b>Warranty:</b> Five years</li> <li><b>Material:</b> Powder coated die casting aluminum, High standard corrosion resistant finishing and UV resistant can be optional if required.</li> <li><b>Certificated:</b> <b>CE, TUV, ROHS, FCC, DLC</b></li> <li><b>Body color :</b> Grey/ Black/Silver</li> </ul>																																									
<p><b>SPECIFICATIONS</b></p>	<p><b>BENEFITS</b></p> <ul style="list-style-type: none"> <li><b>Installation</b> 6 different kinds of bracket available for pole, wall...etc installation.</li> <li><b>Excellent Heat Sink Design:</b> Hollow out heat sink design make the lamp lighter and good heat dissipation.</li> <li><b>Power Supply design:</b> Built-in Meanwell driver, meet IEC standard.</li> <li><b>Application:</b> Industrial, freeway, country road, landscape area</li> </ul>																																								
<table border="1"> <tr><td>Part No.</td><td>MF-P020</td></tr> <tr><td>THD:</td><td>&lt;15%</td></tr> <tr><td>CCT:</td><td>3000K,4000K and 5000K</td></tr> <tr><td>CRI:</td><td>Ra80+</td></tr> <tr><td>Beam angle:</td><td>90°, 120°, 90*120°, 85*135°</td></tr> <tr><td>Input Voltage:</td><td>AC85-265V 50/60Hz</td></tr> <tr><td>Power Factor:</td><td>&gt;0.98</td></tr> <tr><td>LED Power:</td><td>20W</td></tr> <tr><td>System Consumption:</td><td>24W</td></tr> <tr><td>LED Driver:</td><td>Meanwell driver</td></tr> <tr><td>LED Chip:</td><td>SAMSUNG,Cree Options</td></tr> <tr><td>Total Lumens</td><td>2500lm</td></tr> <tr><td>Efficacy</td><td>130+ lm/w</td></tr> <tr><td>Mounting:</td><td>pole/wall mount as option</td></tr> <tr><td>IP Rating</td><td>IP65</td></tr> <tr><td>Working Condition:</td><td>Temperature: -40°C~60°C Humidity: 10%~95%</td></tr> <tr><td>Lifetime:</td><td>100,000 hrs</td></tr> <tr><td>Weight:</td><td>N.W:4.5Kg G.W:6.0kg</td></tr> <tr><td>Product Size:</td><td>364(L)x275(W)x176(H)MM</td></tr> <tr><td>Packing:</td><td>400(L)X 395(W)X 115(H) MM/1PCS</td></tr> </table>	Part No.	MF-P020	THD:	<15%	CCT:	3000K,4000K and 5000K	CRI:	Ra80+	Beam angle:	90°, 120°, 90*120°, 85*135°	Input Voltage:	AC85-265V 50/60Hz	Power Factor:	>0.98	LED Power:	20W	System Consumption:	24W	LED Driver:	Meanwell driver	LED Chip:	SAMSUNG,Cree Options	Total Lumens	2500lm	Efficacy	130+ lm/w	Mounting:	pole/wall mount as option	IP Rating	IP65	Working Condition:	Temperature: -40°C~60°C Humidity: 10%~95%	Lifetime:	100,000 hrs	Weight:	N.W:4.5Kg G.W:6.0kg	Product Size:	364(L)x275(W)x176(H)MM	Packing:	400(L)X 395(W)X 115(H) MM/1PCS	<p><b>Light Distribution Curve</b></p>  <p><b>Certifications:</b> CE, GS, RoHS, CB, CREE, FC, DLG, IP65, MW, SAMSUNG</p>
Part No.	MF-P020																																								
THD:	<15%																																								
CCT:	3000K,4000K and 5000K																																								
CRI:	Ra80+																																								
Beam angle:	90°, 120°, 90*120°, 85*135°																																								
Input Voltage:	AC85-265V 50/60Hz																																								
Power Factor:	>0.98																																								
LED Power:	20W																																								
System Consumption:	24W																																								
LED Driver:	Meanwell driver																																								
LED Chip:	SAMSUNG,Cree Options																																								
Total Lumens	2500lm																																								
Efficacy	130+ lm/w																																								
Mounting:	pole/wall mount as option																																								
IP Rating	IP65																																								
Working Condition:	Temperature: -40°C~60°C Humidity: 10%~95%																																								
Lifetime:	100,000 hrs																																								
Weight:	N.W:4.5Kg G.W:6.0kg																																								
Product Size:	364(L)x275(W)x176(H)MM																																								
Packing:	400(L)X 395(W)X 115(H) MM/1PCS																																								